


COUPLING RANURADO RÍGIDO



Tamaño Nominal mm/pulg.	D.E. de Tubería mm/pulg.	Presión de Trabajo psi/Mpa	Tamaño de Perno	Dimensiones mm/pulg.		
			No. - Tamaño mm	φ	L	H
32 1 ¼"	42.4 1.669	300 psi 2.07 Mpa	3/8*45-2	65 2.55	108 4.25	44 1.74
40 1 ½"	48.3 1.9	300 psi 2.07 Mpa	3/8*45-2	72 2.84	114 4.48	44 1.74
50 2"	60.3 2.375	300 psi 2.07 Mpa	3/8*55-2	84 3.30	126 4.96	46 1.81
65 2 ½"	76.1 3	300 psi 2.07 Mpa	3/8*55-2	100 3.93	142 5.59	46 1.81
80 3"	88.9 3.9	300 psi 2.07 Mpa	3/8*55-2	114 4.48	154 6.06	46 1.81
100 4"	114.3 4.5	300 psi 2.07 Mpa	1/2*65-2	138 5.43	192 7.55	50 1.96
150 6"	168.3 6.625	300 psi 2.07 Mpa	1/2*75-2	200 7.87	252 9.92	50 1.96
200 8"	219.1 8.625	300 psi 2.07 Mpa	5/8*95-2	258 10.15	322 12.67	60 2.36
250 10"	273 10.75	300 psi 2.07 Mpa	3/4*110-2	318 12.51	400 15.74	62 2.44
300 12"	323.9 12.750	300 psi 2.07 Mpa	3/4*120-2	372 14.64	454 17.87	64 2.51

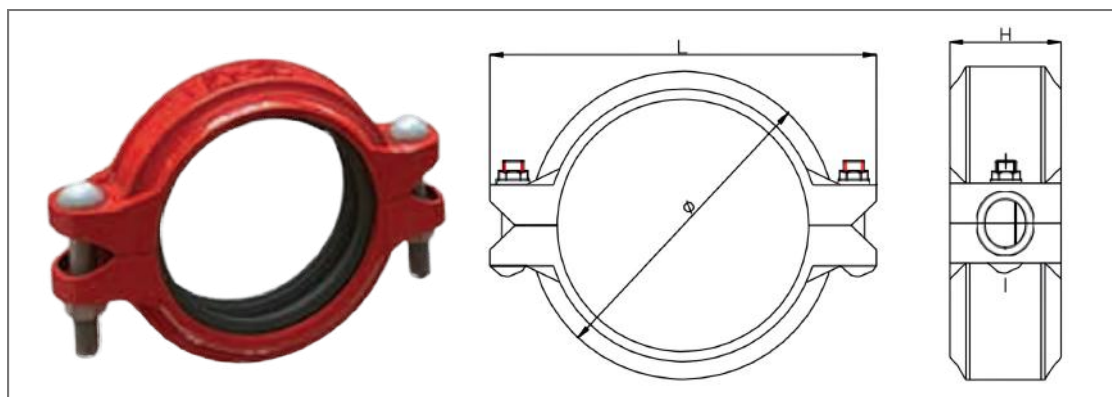