


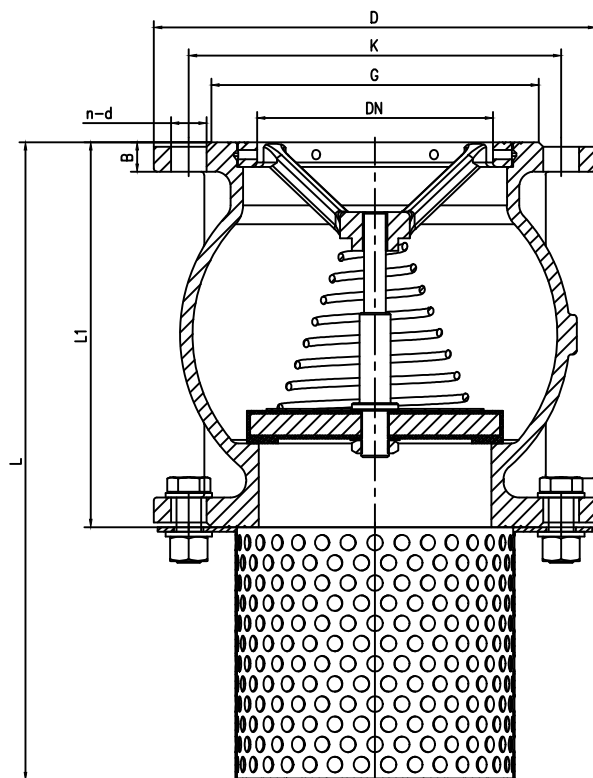

DN	L	L1	EN1092-2 PN10					EN1092-2 PN16					ASME B16.42 (CL125/150)			
			D	K	G	n-d	B	D	K	G	n-d	B	D	K	n-d	B
50	183	140	165	125	99	4-19	19	165	125	99	4-19	19	150	120.7	4-19	19
65	197	140	185	145	118	4-19	19	185	145	118	4-19	19	180	139.7	4-19	22.3
80	221	152	200	160	132	8-19	19	200	160	132	8-19	19	190	152.4	4-19	23.8
100	280	184	220	180	156	8-19	19	220	180	156	8-19	19	230	190.5	8-19	23.8
125	324	216	250	210	184	8-19	19	250	210	184	8-19	19	255	215.9	8-22	23.8
150	411	248	285	240	211	8-23	19	285	240	211	8-23	19	280	241.3	8-22	25.4
200	530	317	340	295	266	8-23	20	340	295	266	12-23	20	345	298.5	8-22	28.6
250	659	394	405	350	319	12-23	22	405	355	319	12-28	22	405	362	12-25	30.2
300	679	362	460	400	370	12-23	24.5	460	410	370	12-28	24.5	485	431.8	12-25	31.8
350	692	400	505	460	429	16-23	24.5	520	470	429	16-28	26.5	535	476.3	12-28.5	35
400	766	448	565	515	480	16-28	24.5	580	525	480	16-31	28	595	539.8	16-28.5	36.5
450	872	476	615	565	530	20-28	25.5	640	585	548	20-31	30	635	577.9	16-32	39.7
500	927	524	670	620	582	20-28	26.5	715	650	609	20-34	31.5	700	635	20-32	42.9
600	1035	610	780	725	682	20-31	30	840	770	720	20-37	36	815	749.3	20-35	47.6

13	Screw	Stainless steel 304
12	Body	Ductile iron GGG50
11	Guide seat	Ductile iron GGG50
10	Sleeve	Copper
9	Tower Spring	Stainless steel 304
8	Guide shaft	Stainless steel 304
7	Spool	Steel+NBR
6	Washer	Stainless steel 304
5	Hexagon nut	Stainless steel 304
4	Bolt	Stainless steel 304
3	Washer	Stainless steel 304
2	Hexagon nut	Stainless steel 304
1	Filters	Stainless steel 304
NO.	PART NAME	MATERIAL

Mark	No	Change File No	Sign	Date	ASSEMBLY DRAWINGS			FOOT VALVE DOUBLE FLANGED	
Designer									
Corrector					Drawing	Mark	Weight	Scale	DN50-600
Auditor			Approved by						
Technologist			Date		Total	Pages	The	Page	